



5680

Front Mounted, Security Lavatory

This Front Mounted Security Lavatory is designed for applications without an accessible pipe chase. The fixture is fabricated using heavy gauge type 304 stainless steel seamlessly welded to form a vandal resistant unit. The bottom panel is removable and is secured in place with stainless steel vandal resistant screws. Valves are normally installed inside the fixture body and the bubbler spout is plumbed from the back splash into the fixture cavity.

INSTALLATION

The installer must rough in piping to locations shown on drawings provided by Metcraft. Wall anchors must be embedded in the wall at locations shown on the drawings. A hanger bracket is provided for supporting fixture at top of back splash. Bolts provided with fixture 1/2" (13mm) dia. secure the fixture to the embedded wall anchors. Plumbing connections are made through the bottom of the fixture with the access panel removed. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

STANDARD FEATURES

- Rectangular basin with multi-hole fast drain.
- Integral ribbed soap tray.
- 4" (102mm) high backsplash.
- Penal filler/bubbler.
- 1 1/2" (38mm) OD slip joint P-trap.
- Dual temperature pushbutton pneumatic metering valve



Unit may be pictured with some optional features.

OPTIONS & ACCESSORIES


A168	Metal template
B1	Penal filler/bubbler
B2	Penal filler/bubbler w/mouthguard
B3	Filler only
OB	Oval basin
A311	Single temperature, pneumatic valve
A312	Hot & cold, pneumatic valve
HT	Single tension release towel hook
TB	Toothbrush holder

METCRAFT


- I N D U S T R I E S I N C . -




FIXTURE PLAN VIEW

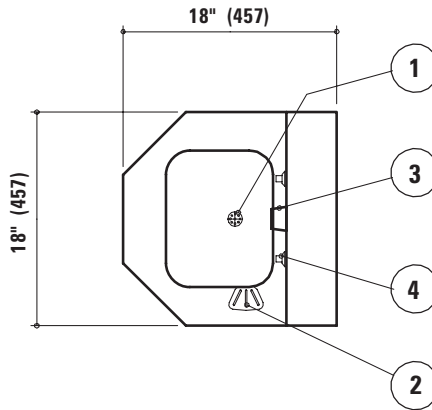

FIXTURE SIDE VIEW

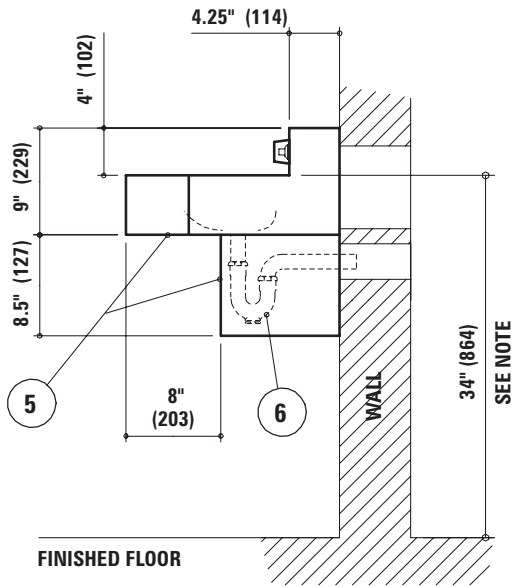

WALL ELEVATION VIEW (fixture side)

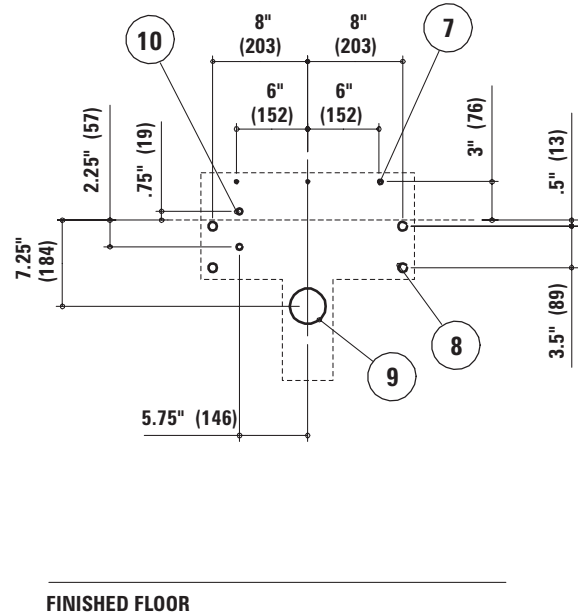

ROUGH-IN INFORMATION

- | | | |
|----------------------------------|--|--|
| ① Fast drain | ⑤ Tamper resistant removable bottom | ⑨ Lavatory sink waste outlet |
| ② Soap dish | ⑥ P-trap | ⑩ Valve water supply connection
3/8" (10mm) NCT |
| ③ Penal filler/bubbler | ⑦ Wall bracket holes, 5/16" (8mm) dia. (3) | |
| ④ Hot and cold valve pushbuttons | ⑧ Anchor locations with 1/2" (13mm) wall fasteners (4) | |

NOTE: To mount lavatory in accordance with "A.D.A." requirements the rim height must be mounted at 34" (864mm) above finished floor.

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

2007



INDUSTRIES INC.