



4130 BACK SUPPLY 4135 TOP SUPPLY

Floor Mounted, Blowout Type

These Toilet Fixtures are designed for high security areas with an accessible pipe chase. The fixtures are fabricated using heavy gauge type 304 stainless steel, seamlessly welded to form a one piece, vandal resistant unit. Internal piping is stainless steel. Exposed surfaces have a satin finish, except for the integral seat which is polished to a bright mirror finish.

PERFORMANCE

Metcraft bowls and assemblies are designed to withstand 5000 lb. (22kN) loading without permanent deflection and damage. They meet or exceed ASME 112.19.6M for hydraulic performance and ASME 112.19.2M for physical dimensions. The trap will pass a 2 5/8" (67mm) dia. ball. A minimum 1" (25mm) supply of 25psi (172kPa) flushing pressure is required.

Water Consumption:

With a water saver flush valve - 3.5 gpf (13 liters)

With a low consumption flush valve - 1.6 gpf (6 liters)

INSTALLATION

An accessible pipe chase is required. Four 1/2" (13mm) dia. plated steel anchor rods screw into sockets on back of the fixture. Anchor rods pass through the wall and are secured with washer lugs and hex nuts on the chase side of the wall. A floor clip with two 1/2" (13mm) bolts is provided to secure unit to the floor. No exposed fasteners are used. The installer must provide wall openings for anchor rods and piping per rough-in drawings provided by Metcraft. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

NOTE: A security frame (wall sleeve) is recommended when installed on a new block (CMU) or poured concrete wall. A security frame is not appropriate for hollow wall construction.



Unit may be pictured with some optional features.

RECOMMENDED FLUSH VALVES

	SLOAN	ZURN	DELANY
Concealed water saver	952-MBFW	ZH6152-MBFW	1234
Concealed low consumption	952-1.5-MBFW	ZH6152-WS1-MBFW	1234-1.5
Exposed water saver	110	Z6000	439
Exposed low consumption	111	Z6000-1.5	439-1.5

STANDARD FEATURES


- Floor mounted, wall outlet waste.
- Plated steel concealed anchor rods and fasteners.
- 4130 back supply connection 1 1/2" (38mm) FIPT.
- 4135 top supply connection 1 1/2" (38mm) MIPT.
- Integral elongated seat.
- Self draining flushing rim.
- Blowout flushing action.
- 3" (76mm) OD toilet waste tube with plain end extended 4" (102mm) past back of fixture for NH type connection.
- Fully enclosed trap

METCRAFT


INDUSTRIES INC.




FIXTURE PLAN VIEW

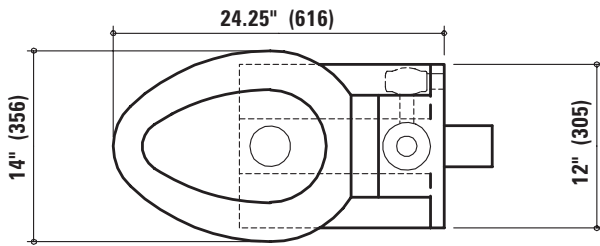


Z-CLIP ANCHOR DETAIL

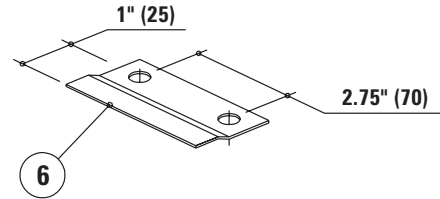

FIXTURE SIDE VIEW

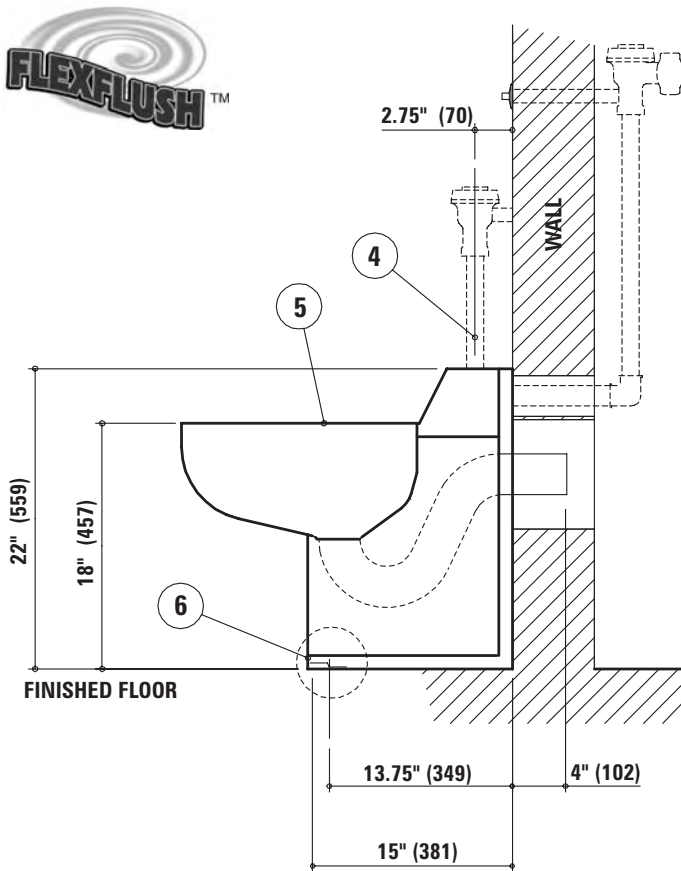

WALL ELEVATION VIEW (fixture side)

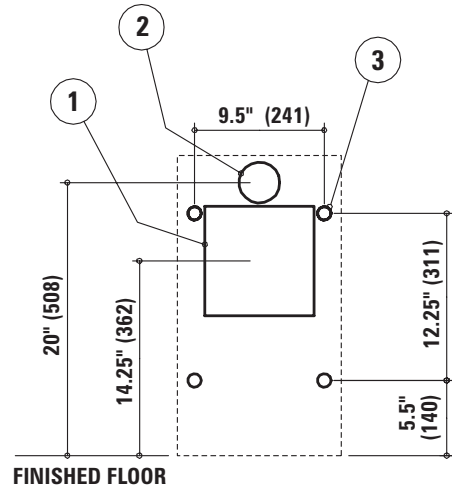

ROUGH-IN INFORMATION

- ① 8" x 8" (203mm x 203mm) wall opening for toilet waste connection
- ② 3" (76mm) wall opening for 1 1/2" (38mm) FIPT flush supply inlet (model #4130)
- ③ 1" (25mm) dia. wall openings for anchors (4)
- ④ 1 1/2" (38mm) MIPT top supply inlet (model #4135)
- ⑤ Mirror finish seat
- ⑥ Floor mounted Z-clip

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

2007





THE FOLLOWING OPTIONS & ACCESSORIES ARE FOR TOILET FIXTURE MODEL NO'S:

4110/4115, 4130/4135, 4150/4155, 4180/4185, 4160/4165, 4108R&L

ACCESSORY ITEMS

- A120** Security frame (wall sleeve)
- A168** Metal template

TOILET SEAT

- HS** Hinged white plastic seat (no cover)

TOILETRY ACCESSORIES

- A720** Wall mounted tissue holder

TOILET WASTE

- PL** Waste extension 3" (76mm) into chase
- GW** Gasket waste outlet

TOILET WASTE PLAIN END COUPLINGS

- A210-1** 3" (76mm) s/s to 4" (102mm) CI
- A210-2** 3" (76mm) s/s to 4" (102mm) PL
- A210-3** 3" (76mm) s/s to 3" (76mm) CI
- A210-4** 3" (76mm) s/s to 3" (76mm) PL

TOILET WASTE NO-HUB CLEANOUT TEES

- A215-3** 3" (76mm)
- A215-4** 4" (102mm)

TOILET WASTE PINNED CLEANOUT PLUGS

- A216-3** 3" (76mm)
- A216-4** 4" (102mm)

GASKET WASTE CONNECTIONS

- A228** Torque 4" (102mm) NH floor

TOP SUPPLY MODELS:

- A615** Flush valve enclosure

BACK SUPPLY MODELS:

- A611** Flush valve access panel 15" (381mm) x 19" (483mm)

ANTI-FLOOD OPTIONS

- AFH** Hydraulic Anti-flood device

Special Notes on Anti-flood:

Only available on rear mounted, rear supply models which include:

4108R & L

4110

4130

4150

4160

4180

Not available on Top supply or Front mounted models which include:

4115

4135

4155

4165

4185

4610/4615

4630/4635

4650/4655

4651/4656

4660/4665

4680/4685



INDUSTRIES INC.